

X1



SOLAX SOLAR INVERTER

SL-TL1500 / 2200 / 2800 / 3000 / 3600

High efficiency and long time working

SINGLE PHASE

High performance

- MPPT efficiency up to 99.9%
- Maximum efficiency up to 97.6%
- Maximum DC input voltage of 580V
- Wide MPPT voltage range allows more energy harvesting


Flexibility and reliability

- Low turn-on and off voltage and longer working time
- Fanless, quiet and low maintenance
- High protection class IP65 (indoor/outdoor use)
- Multiple protections: RCD, isolation, over voltage, and earth protection, etc

User-friendly

- Multi-lingual display
- Backlight 16 x 2 characters LCD
- RS485, WIFI and 3G (optional) communication for monitoring
- "Plug and play" connection for easy installation and maintenance

Efficiency Curve

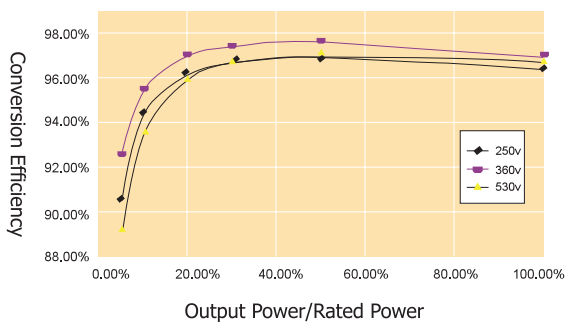

Technical Data

Inverter Model	SL-TL1500	SL-TL2200	SL-TL2800	SL-TL3000	SL-TL3600
----------------	-----------	-----------	-----------	-----------	-----------

► Input (DC)

Max. recommended DC power [W]	1700	2300	3000	3200	4000
Max. turn on DC voltage [V]	580	580	580	580	580
Max. input current [A]	10	12	13.8	15	17
MPPT voltage range [V]	125-530	125-530	125-530	125-530	125-530
Min. DC voltage /start voltage [V]	70/100	70/100	70/100	70/100	70/100
Number of MPP trackers /strings per MPP tracker	1/1	1/1	1/2	1/2	1/2

► Output (AC)

AC nominal power [W]	1500	2000	2600	3000	3680
Max. AC power [W]	1650	2200	2800	3000	3680
Nominal AC voltage; range [V]	220/230/240 ; 180-280				207-264(G83/2)
AC grid frequency; range [Hz]	50/±5				47-50.5(G83/2)
Max. AC current [A]	7.5	10	13	13.2	16
Power factor (Full load)	>0.99	>0.99	>0.99	>0.99	>0.99
Total harmonic distortion (THD)	<3%	<3%	<3%	<3%	<3%

► Efficiency

MPPT efficiency	99.9%	99.9%	99.9%	99.9%	99.9%
Euro-efficiency	96.5%	96.8%	96.9%	96.9%	97.1%
Max. efficiency	97.4%	97.5%	97.6%	97.6%	97.6%

► Power consumption

Input standby power [W]	3.5	3.5	3.5	3.5	3.5
Internal consumption (night) [W]	0	0	0	0	0

► Safety and protection

Internal overvoltage protection	YES
DC insulation monitoring	YES
Grid monitoring	YES
Earth fault current monitoring	YES
DC current monitoring	YES
Islanding protection	YES
RCD protection	YES

► Environment limits

Degree of protection	IP65
Operating temperature range [°C]	-20~60 (derating at 45)
Humidity [%]	0~95 (non-condensing)
Altitude [m]	2000
Storage temperature [°C]	-20~60
Noise emission (typical) [dB]	< 30

► Dimensions and weight

Dimensions (WxHxD)[mm]	376x437x143				
Weight [Kg]	16	16	16.5	16.5	16.5
Cooling concept	Convection				
Topology	Transformer-less				
Communication interfaces	RS485/RS232 (WIFI standard)				
LCD display	Backlight, 16x2 character LCD				
Standard warranty [years]	5 (10 optional)				